


Audio,Control and Instrument Cable

Foiled Shielded

Overall Foiled shielded

UL Type CM

75°C, 300 Volt

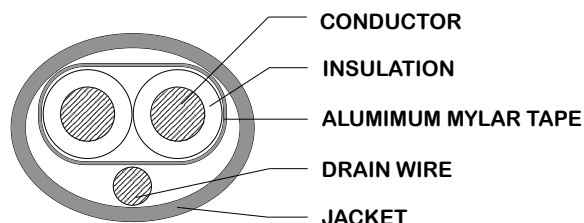

Conductor : Tinned stranded concentric bare copper


Insulation : PE

Shield : 100% coverage, aluminium polyester foil shield

Drain Wire : 7 strands tinned copper

Jacket : PVC

Application : For building sound,broadcast,audio control and Instrument use. Passes UL FT4 flame test.

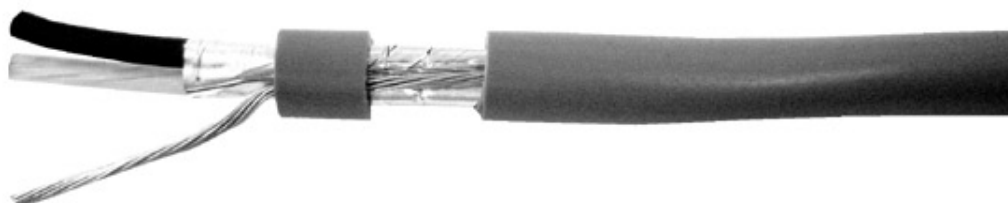

UL File No. : E135928, CSA File No. : LL 80602
(UL type CM and CSA type CMG FT4 Listed)

Standard	No/mm.	AWG	No. of pairs	Insulation Diameter	Jacket material	Norminal OD.(mm)	Jacket color	Part Number
UL type CM	7/0.26	22	1	1.70	PVC	5.6	Grey	9222
	10/0.26	20	1	1.85	PVC	5.9	Grey	9220
	16/0.26	18	1	2.10	PVC	6.4	Grey	9218
	26/0.26	16	1	3.15	PVC	8.5	Grey	9216
CSA type CMG FT4	42/0.26	14	1	3.55	PVC	9.3	Grey	9214
	65/0.26	12	1	4.20	PVC	11.0	Grey	9212
	16/0.26	18	1	2.10	PVC	8.8	Black	9218-D
	26/0.26	16	1	3.15	PVC	10.9	Black	9216-D

