


■ Specifications

	PA-6348
Rated Output Power (THD 5%, 1kHz)	480W
Frequency Response (+1/-3dB)	70Hz-18kHz
T.H.D	Less than 1%
High Pass Filter (400Hz)	-3dB
Gain Control	-12dB
S/N	Better than 95dB
Input Sensitivity / Impedance	1V/10k Ω Balanced
Output Voltage / Impedance	4 Ω / 43.8V
	10.2 Ω / 70V
	20.8 Ω / 100V
Operating Temperature	-10°C ~ +40°C
Power Source	AC 120V ~ 220V, 50 / 60Hz, DC 24V
Power Consumption (1/8 power)	600W
Weight (SET)	22kg / 48lb
Dimensions (SET)	482(W) × 132(H) × 280(D)mm / 19(W) x 5.2(H) x 11(D)in

■ Connection

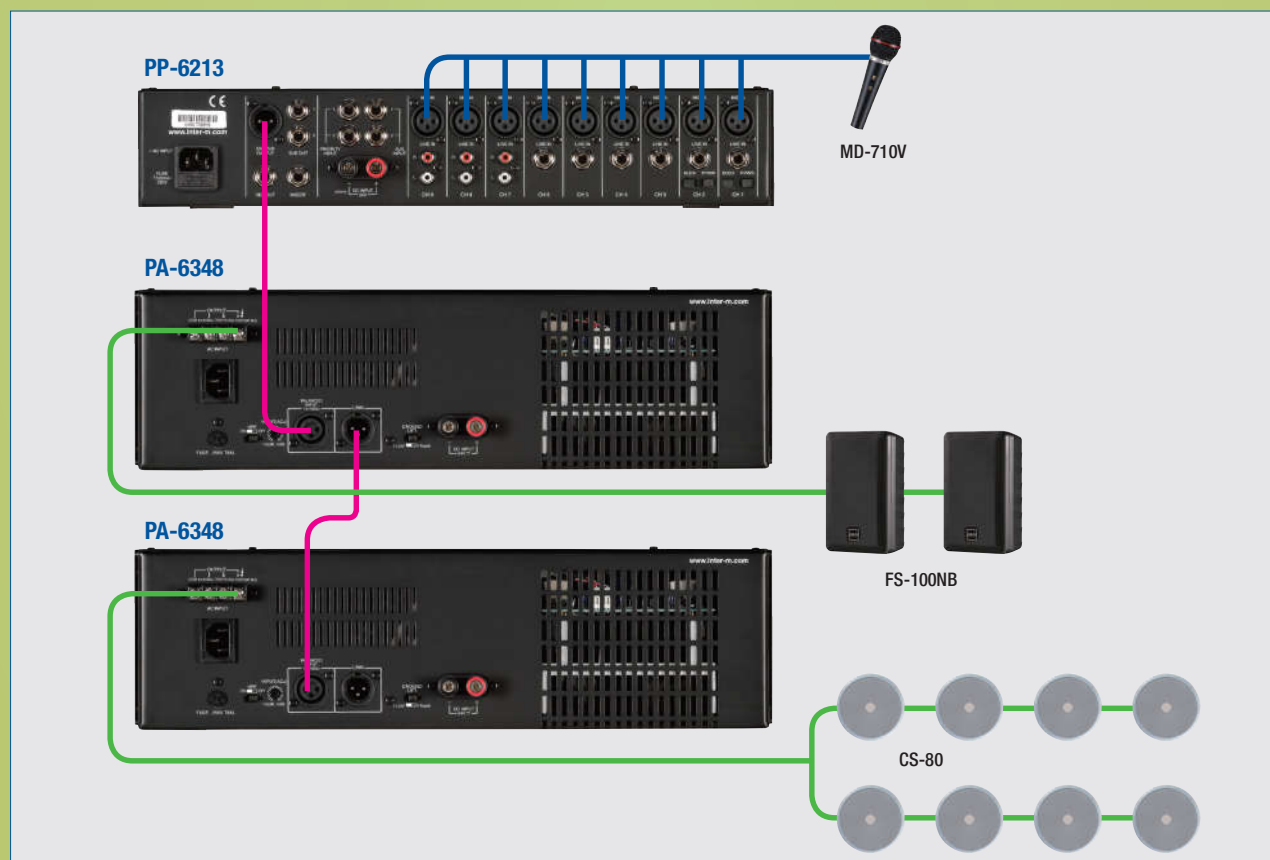

Inter-M Corp. (IMK)



719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com

※ Design and specification are subject to be changed for the improvement of product quality without pre notice.

2015. 4. V1