




DESCRIPTION

The Q-GS402-GR is a compact Garden Speaker ideal for paging and background music broadcast in such places as gardens, theme parks and resort facilities. Corrosion resistant material is adopted to the speaker exterior, ensuring prolonged use of the speaker in a water-splashed environment. The appearance of Garden Speaker is designed so inconspicuous that the speaker can be installed in shrubberies of garden blending with the surroundings.

SPECIFICATIONS

Enclosure	Sealed type
Rated Input	40 W (100 V line), 20 W (70 V line)
Rated Impedance	100 V line: 250 Ω (40 W), 500 Ω (20 W), 1 k Ω (10 W), 2 k Ω (5 W) 70 V line: 250 Ω (20 W), 500 Ω (10 W), 1 k Ω (5 W), 2 k Ω (2.5 W)
Sensitivity	85 dB (1 W, 1 m)
Frequency Response	100 Hz - 8 kHz
Speaker Component	12 cm splash-proof cone-type
Input Terminal	Push-in terminal
Applicable Cable	Solid copper wire: ϕ 0.8 - ϕ 1.6 mm, Stranded cooper wire: 0.75 - 1.25 mm ²
Water Protection	IPX4
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Finish	Top cover and base : FRP resin, green, matt, paint Speaker panel : ABS resin, green, matt, paint Legs: Aluminum, green, matt, paint
Dimensions	ϕ 270 X 335 (H) mm
Weight	3.2 kg
Accessory	TOA label *2

APPEARANCE

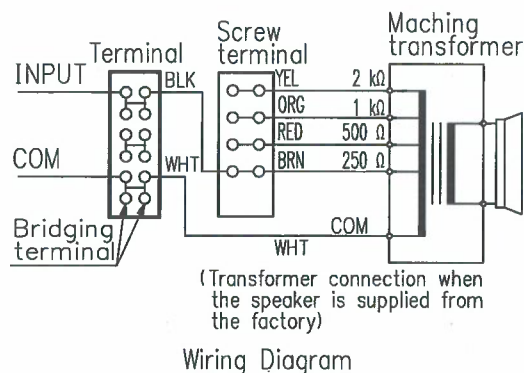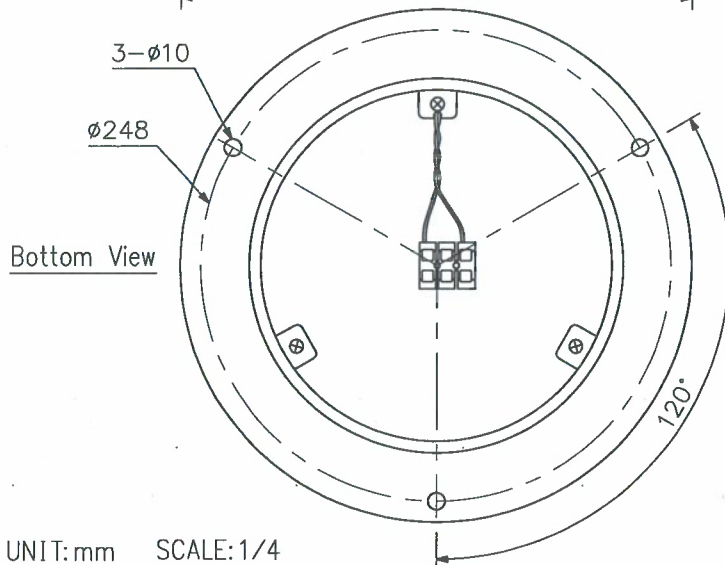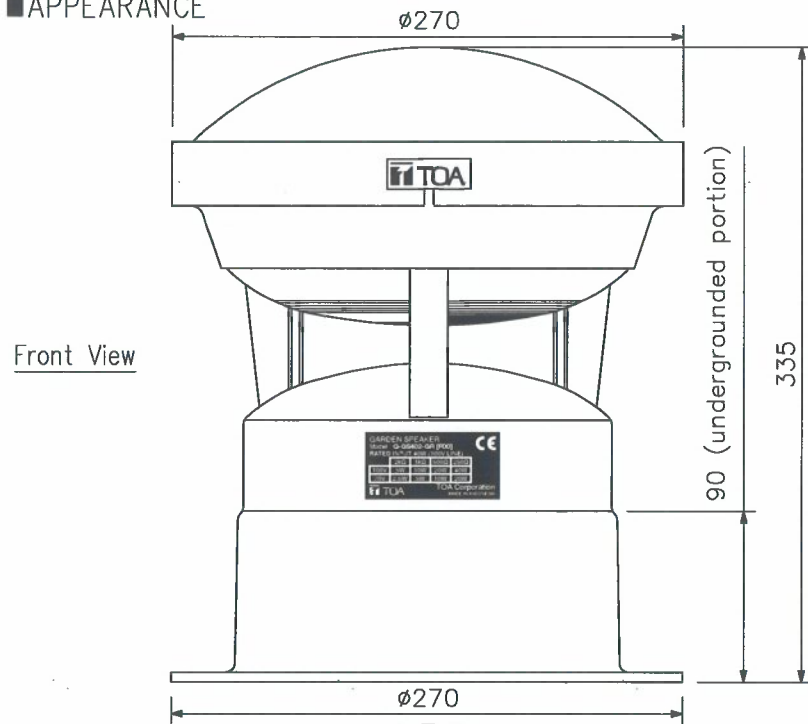

UNIT:mm SCALE:1/4