

The DM-1200D microphone is designed for speech applications and features high intelligibility.




Article number:DM-1200D

Specifications

Controls	Talk switch: Short-off type, slide on/off switch
Frequency response	50 Hz - 12 kHz
Connection	5-pin DIN plug on cable
Rated impedance	600 Ω
Controls	Talk switch: Short-off type, slide on/off switch
Frequency response	50 Hz - 12 kHz
Microphone type	Dynamic microphone
Directivity	Unidirectional
Sensitivity	-52 dB (1 kHz 0 dB = 1 V/Pa)
Connection	5-pin DIN plug on cable
Rated impedance	600 Ω
Finish	Zinc, die-cast, paint, grey metallic,

Appearance

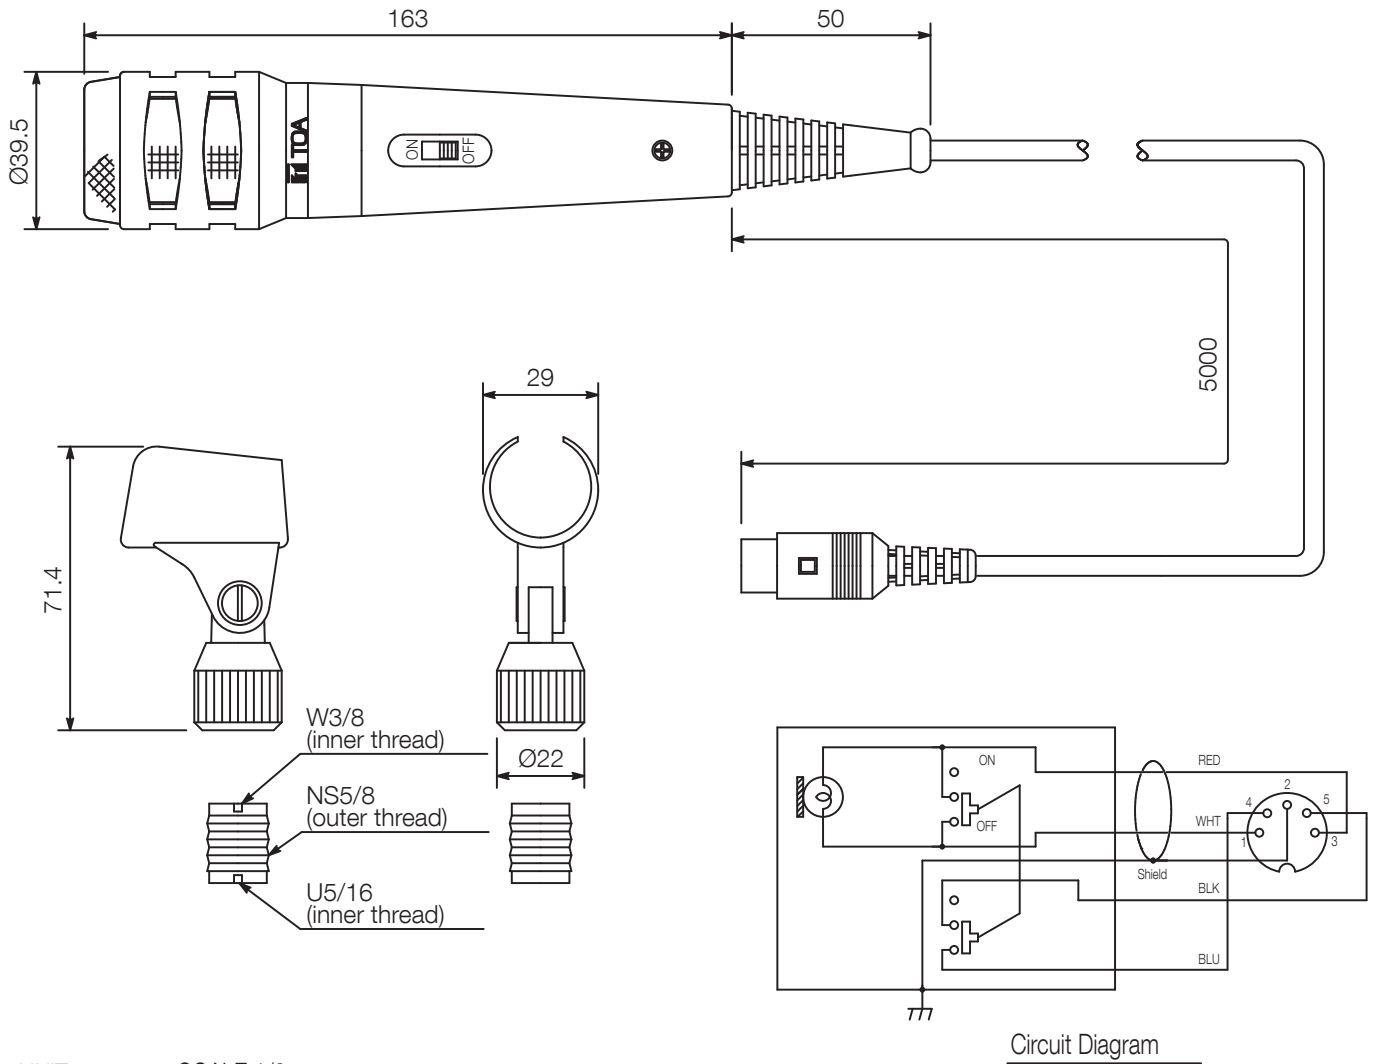

UNIT:mm

SCALE:1/2

Circuit Diagram