

■DESCRIPTION


Being mountable in the EIA rack, the MP-011 monitor panel (1-unit size) comes with both the speaker and output meter, allowing visual and auditory check of audio signal status. Up to ten amplifier input and output levels can be switched and monitored.

■SPECIFICATIONS


* 0 dB = 1 V

Power Source	24 V DC
Current Consumption	400 mA (rated output)
Input	10 inputs Amplifier output level: 50 V, 70 V, 100 V (changeable) Line output level: 0 dB* M3 screw terminal, distance between barriers: 6.4 mm
Monitor Speaker	33 × 140 mm dynamic speaker, 3 W/8 Ω
Meter	7-segment LED meter
Control Signal Input	Emergency control signal (by passes volume control) Talk switch signal (feedback prevention) M3 screw terminal, distance between barriers: 6.4 mm
Finish	Panel: Pre-coated steel plate, black, 30% gloss
Dimensions	482 (W) × 44 (H) × 219.1 (D) mm
Weight	2.5 kg
Accessory	Rack mounting bracket (preinstalled on the unit) ... 2, Rack mounting screw (with washer) ... 4, Cable set ... 1, Name label ... 1


■APPEARANCE



Rear View

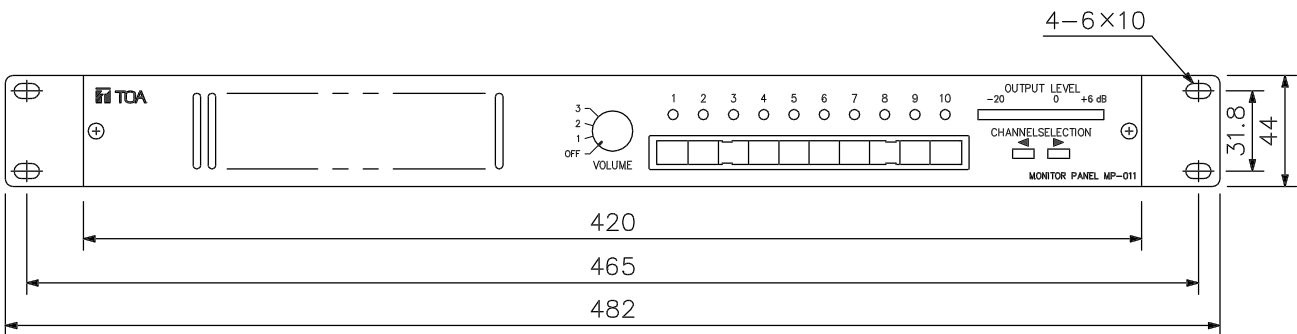

Front View

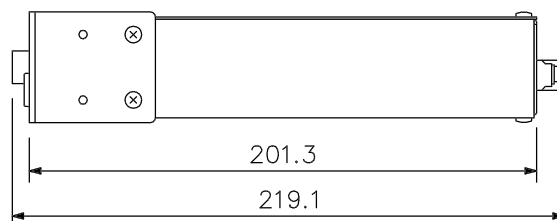

Side View

UNIT:mm SCALE:1/3