

The WM-5270 Wireless Microphone employs a dynamic microphone capsule with high input handling capacity and is suitable for vocal application and other professional uses. Thanks to the PLL-synthesizer system, 16 different operating frequencies (4 banks) are made available. A high output power ensures stable radio signal transmission. The maximum input sound pressure can be set in the range of 130 dB SPL to 142 dB SPL by a PAD switch, permitting adaptation to wide range of input sound pressure.




Article number: WM-5270 C07
Alternative products: WM-5265 C07,
WM-5225 C07

Specifications

Power source	Battery 1 AA size alkaline battery, 1.5 V
Battery life	10 h
Microphone type	Dynamic
Directivity	Cardioid
Power source	Battery 1 AA size alkaline battery, 1.5 V
Frequency range	794 – 830 MHz
Selectable frequencies	64
Simultaneous channels	16
AF response	80 Hz - 15 kHz
RF output power	10 mW
Maximum SPL	142 dB
Finish	Metal, dark grey,
Operating humidity	30% - 85%
Operating temperature	-10°C ... +50°C

Appearance

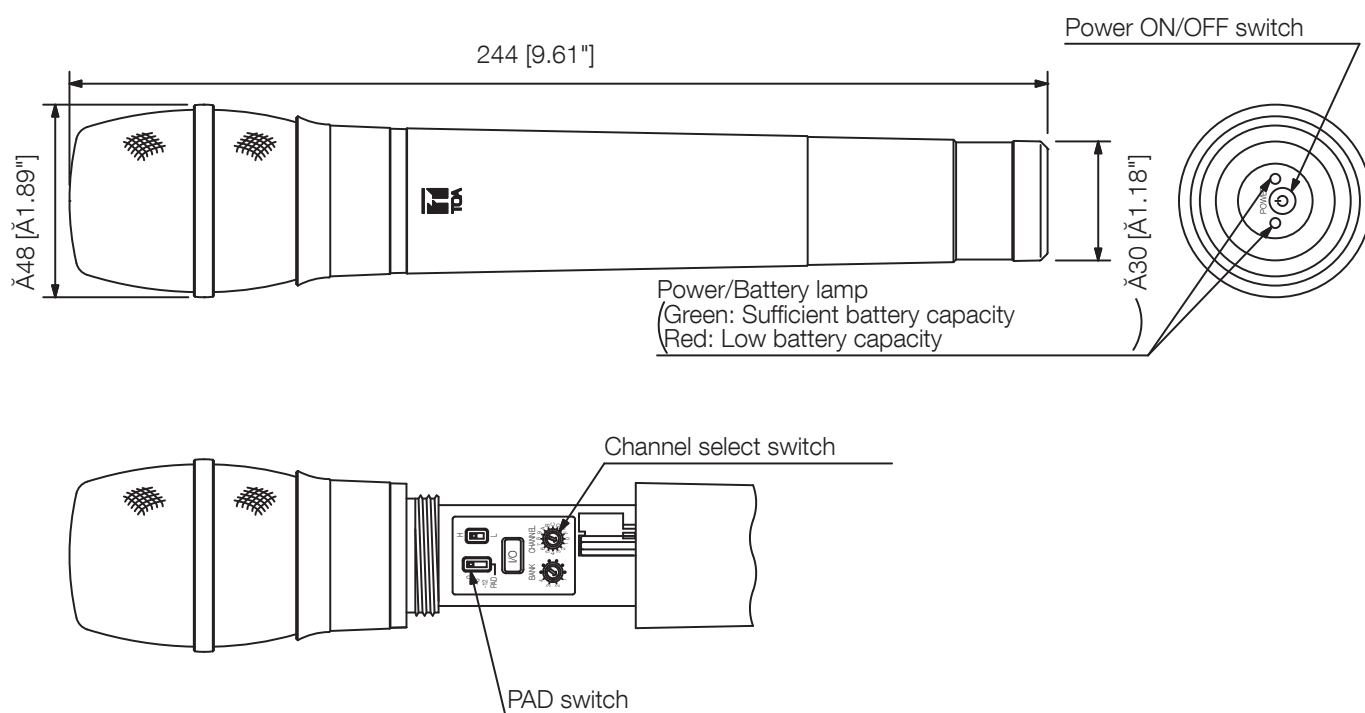

UNIT:mm

SCALE:1/2