

T-770T Dual-directional Projection Loudspeaker(5W-10W-20W)

Features

- Built-in 100v/70v transformer
- Waterproof projector type loudspeaker
- 2x6" full range speaker unit
- IP66 waterproof level
- Power taps 5w-10w-20w @100V
- Aluminum enclosure and metal bracket

Description

The T-770T is a dual-directional waterproof projection speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.



The built-in two 6" full range speaker drivers are designed of wide frequency response 110-15kHz, the multiple power taps 5W, 10W & 20W are helpful for different applications varies from room size and ambient noise surroundings.

The aluminum enclosure and metal bracket are of white color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in the outdoor area of train station, shopping mall, parking area and factory where background music and paging is needed.


Specification

Model	Т-770Т
Power Taps @100V	5W, 10W, 20W
Power Taps @70V	2.5W, 5W, 10W
Impedance	Blue: Com Green: 2 K Ω Yellow: 1K Ω Red: 500 Ω
SPL(1W/1M)	92dB
Max. SPL (Rated W/1M)	105dB
Frequency Response (-10dB)	110-15KHz
Finish	Baffle: Aluminum, White Grille: Steel, White
Speaker Driver	6"x2
IP Rate	IP x6
Dimensions	172 x 252mm
Weight	3.3Kg
Mounting	With mounting bracket fixed by screw




T-770T Dual-directional Projection Loudspeaker(5W-10W-20W)

Appearance:



Direction Diagram:

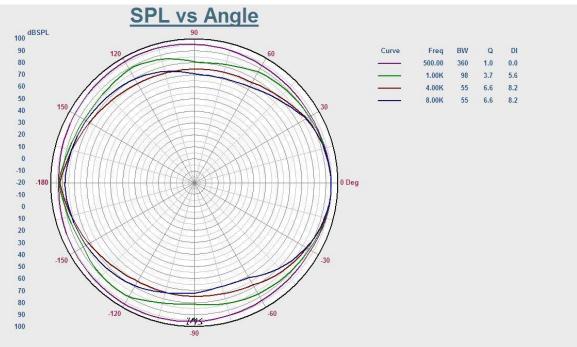

Frequency Response:



Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn